

Ruota Tipo – Wheel Type : PO56 10,0 x 20

VERIFICA

Per garantire quanto richiesto dalla norma, occorre individuare le ruote del costruttore per il/i veicolo/i su cui la ruota in omologazione è destinata ad essere montata.

CASO	Designazione Internazionale del cerchio International wheel description		Size	ET	PCD	CB	Vehicle Type (*)	Vehicle Model Name (*)	Approval No.
	Varianti	Versioni							
A	1	TUTTE	10,0Jx20 H2	19	5x112	66,4	Vehicle Model under approval No. e13*2007/46-195/2013*1165	e13*2007/46-195/2013*1165	
							Vehicle Model under approval No. e13*2007/46-214/2014*1165	e13*2007/46-214/2014*1165	
							Vehicle Model under approval No. e13*2007/46*1165*..	e13*2007/46*1165*..	
							Vehicle Model under approval No. e13*2007/46*1164*..	e13*2007/46*1164*..	

(*) More Info : www.wspitaly.com

In tutti i casi (A) lo specifico componente della Famiglia in omologazione ha profilo esterno alla ruota sostitutiva del costruttore. Pertanto non occorre dare luogo alla verifica dei profili di ingombro (Vedi Disegno 1 allegato 3B).

2.1 Wheel Calliper Check

The wheel calliper check is referred to the inner contour of the wheel and the space for the suspension, steering and brake components of the vehicle on which the wheel must be mounted.


In the case where the calliper is outside the vehicle manufacturer's replacement wheel calliper, isn't necessary to carry out a check of wheel operating clearance respect to brake, suspension and steering components. In the case where the calliper is inside the vehicle manufacturer's replacement wheel calliper, the check shall be carried out in order to fulfill the following criteria:

- 1) minimum clearance for brake components (worst case, for example with new brake linings): > 3 mm
- 2) minimum clearance for suspension components (worst case, for example upper and lower suspension arms): > 4 mm
- 3) minimum clearance for steering components (worst case, for example track rod and steering joints): > 4 mm and
- 4) minimum clearance between balance weights and vehicle components: > 2 mm.

VERIFICATION

To check and verify the wheel calliper criteria we must previously identify the vehicle's manufacturer replacement wheels.

CASO	Designazione Internazionale del cerchio International wheel description		Size	ET	PCD	CB	Vehicle Type (*)	Vehicle Model Name (*)	Approval No.
	Varianti	Versioni							

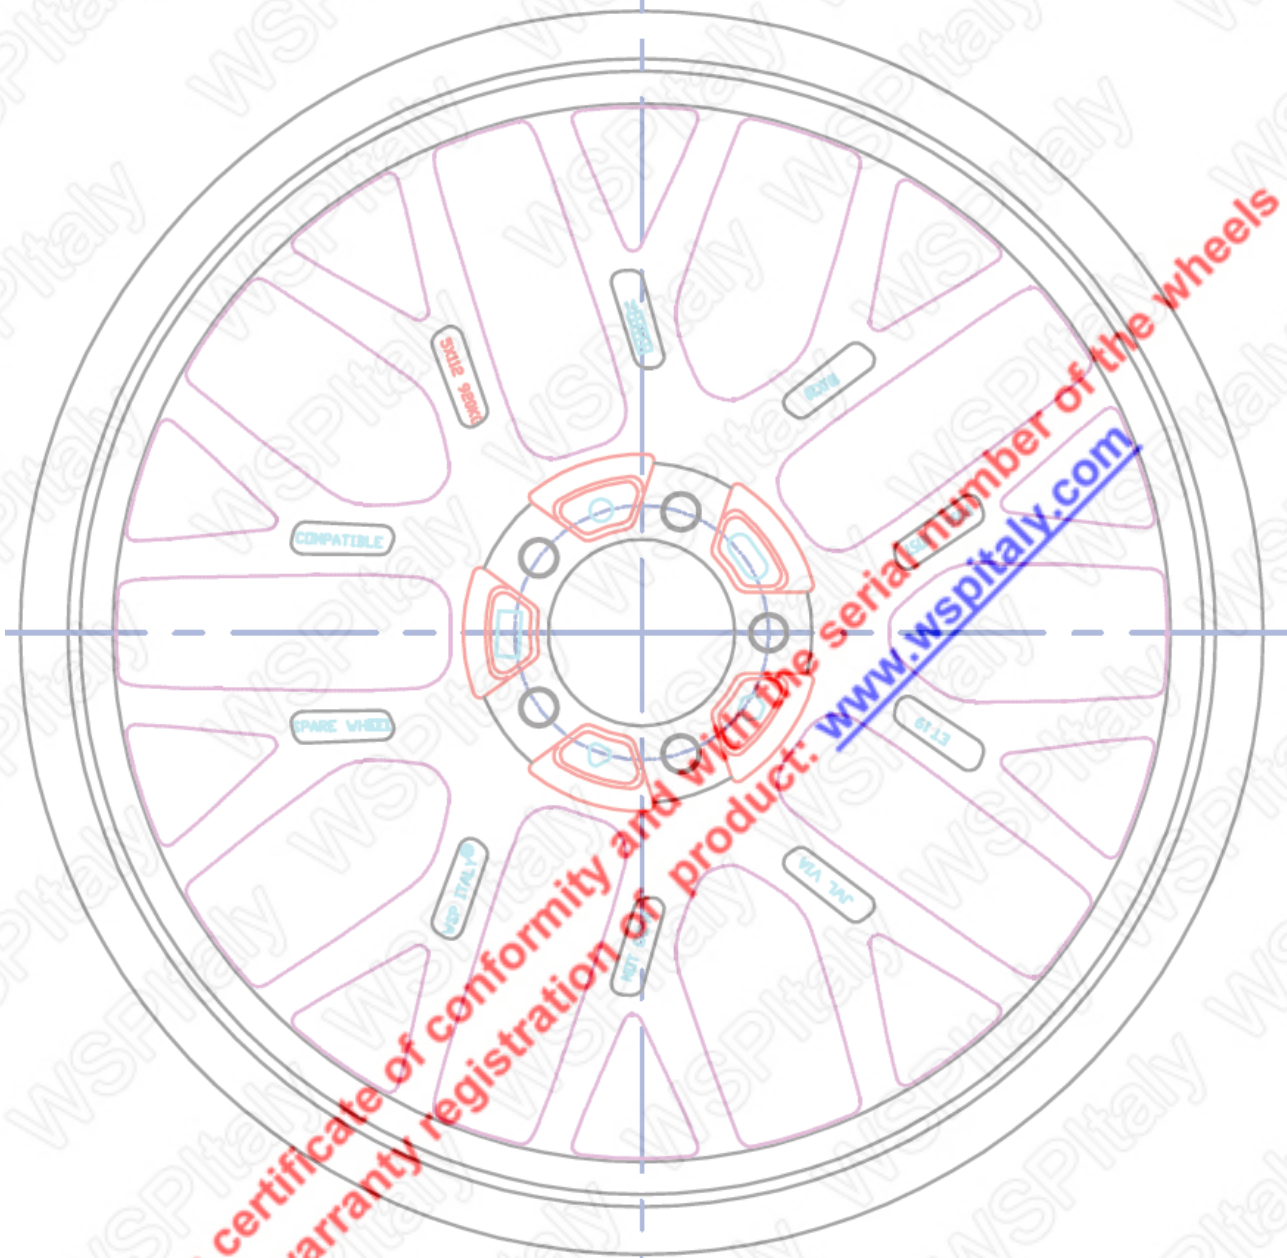

Valid only with the certificate of conformity and with the registration of product: www.wspitaly.com and with the serial number of the wheels